



# **PB26H01.0**

## **Product Specification**

## Approval Sheet

PB26H01.0 Product Specification

RoHS

|                   |           |
|-------------------|-----------|
| <b>Product</b>    | COB       |
| <b>Model Name</b> | PB26H01.0 |
| <b>Issue Date</b> | 2016/03   |



### ■ Features


- ✓ White COB LED (19\*19\*1.5mm)
- ✓ Hot color targeting to 3 step ANSI eclipse bin
- ✓ 2700K,3000K,3500K,4000K,5000K,6500K CCT available
- ✓ Dice Technology : InGaN
- ✓ Environmental friendly ; RoHS compliance

### ■ Applications

- ✓ General lighting
- ✓ Indoor and outdoor commercial lighting
- ✓ PAR lamp, Downlight, etc.


# Outline Dimension

## PB26H01.0 Product Specification

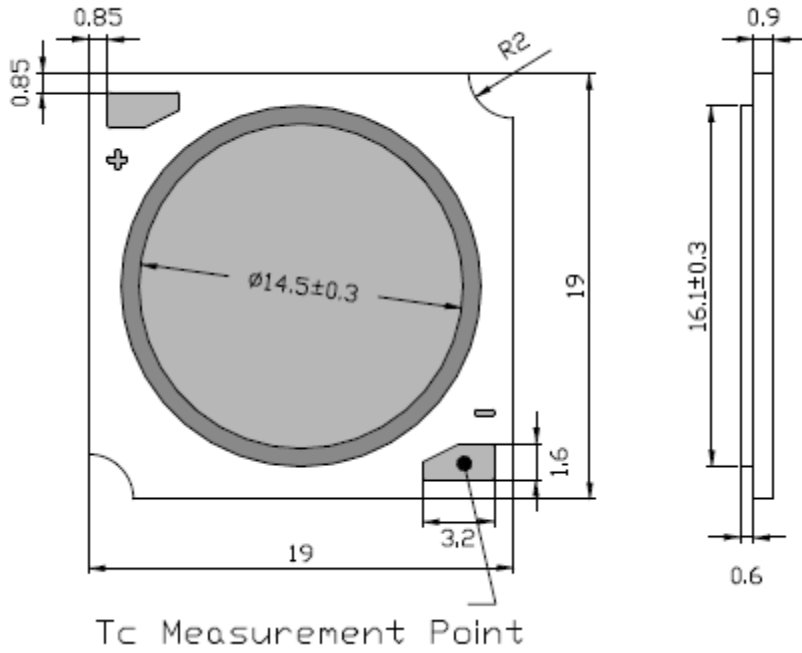

Unit: mm

Tolerances unless otherwise specified:  $\pm 0.2$ mm

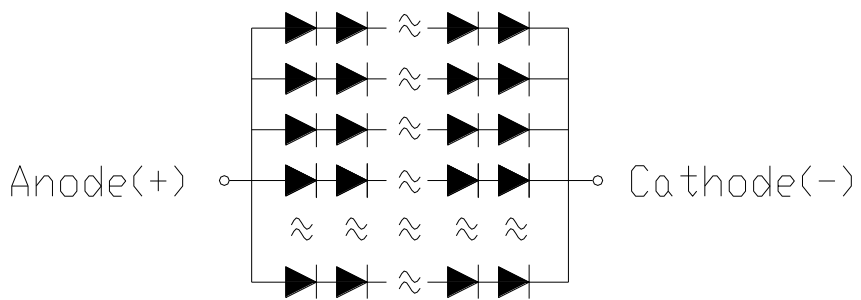

Note: Circuit layout is 6 series and 9 parallel

Performance

PB26H01.0 Product Specification

**Electro-Optical Characteristics (I<sub>F</sub>=720mA)**

| CCT   | Luminous flux<br>(lm) |                      | CRI            |                | Voltage<br>(V) |      |      | Thermal<br>Resistance<br>(°C/W) | View<br>Angle<br>(deg) |
|-------|-----------------------|----------------------|----------------|----------------|----------------|------|------|---------------------------------|------------------------|
|       | T <sub>j</sub> =85°   | T <sub>c</sub> =25°* | R <sub>a</sub> | R <sub>9</sub> | Min.           | Typ. | Max. |                                 |                        |
|       | Typ.                  | Typ.                 | Min.           | Min.           |                |      |      |                                 |                        |
| 2700K | 3,281                 | 3,625                | 80             | 0              | 30.7           | 33.4 | 36.1 | 0.46                            | 120                    |
| 3000K | 3,439                 | 3,800                |                |                |                |      |      |                                 |                        |
| 3500K | 3,519                 | 3,888                |                |                |                |      |      |                                 |                        |
| 4000K | 3,591                 | 3,968                |                |                |                |      |      |                                 |                        |
| 5000K | 3,623                 | 4,003                |                |                |                |      |      |                                 |                        |
| 6500K | 3,591                 | 3,968                |                |                |                |      |      |                                 |                        |

1. Lextar Electronics maintains a tolerance of ±3% on forward voltage ,±7% on luminous flux , ±2 on Ra and R9.


\*Values of Luminous flux at T<sub>c</sub>=25°C are provided as reference only.

**Absolute Maximum Ratings**

| Parameter                            | Symbol           | Value     | Unit |
|--------------------------------------|------------------|-----------|------|
| DC Forward Current <sup>(1)</sup>    | I <sub>F</sub>   | 1800      | mA   |
| Power Dissipation                    | P <sub>d</sub>   | 65.9      | W    |
| Storage Temperature                  | T <sub>c</sub>   | -40 ~ 100 | °C   |
| Junction Temperature                 | T <sub>J</sub>   | 130       | °C   |
| Substrate Temperature                | T <sub>sub</sub> | 100       | °C   |
| Manual Soldering Time at 300 °C(Max) | T <sub>sol</sub> | 3.5       | sec  |

- (1) Please refer to the operating limit sections.

■ Chromaticity Coordinates (Extrapolated to Tc= 85°C)

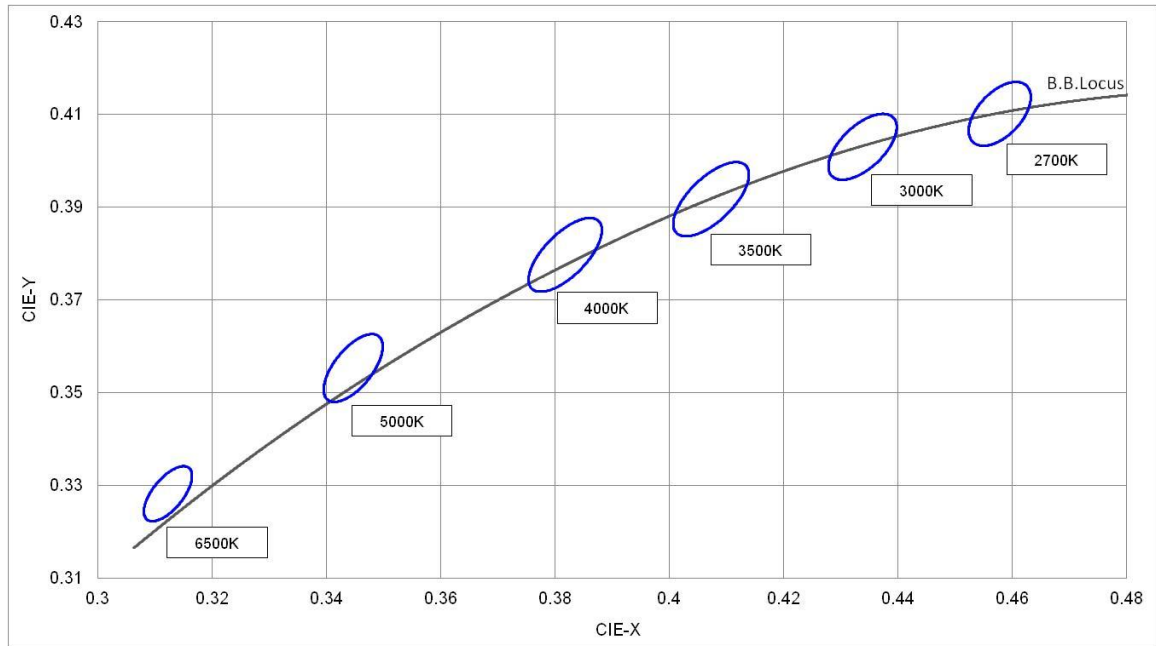

| 3-Step           | 2700K<br>(273) | 3000K<br>(303) | 3500K<br>(353) | 4000K<br>(403) | 5000K<br>(503) | 6500K<br>(653) |
|------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| Center Point, Cx | 0.4578         | 0.4338         | 0.4073         | 0.3818         | 0.3447         | 0.3123         |
| Center Point, Cy | 0.4101         | 0.4030         | 0.3917         | 0.3797         | 0.3553         | 0.3282         |
| Major Axis, a    | 0.00774        | 0.00834        | 0.00951        | 0.00939        | 0.00822        | 0.00669        |
| Minor Axis, b    | 0.00411        | 0.00408        | 0.00417        | 0.00402        | 0.00354        | 0.00285        |
| Rotation Angle   | 57.28          | 53.17          | 52.97          | 54.00          | 59.62          | 58.57          |

1. Tolerance of measurement is Chromaticity (x,y) ± 0.005.

■ **Binning (IF=720mA)**

| CCT | Step | CRI | Flux | Voltage |
|-----|------|-----|------|---------|
| 27  | 3    | A   | U1   | DB      |

| CCT Bin Code | CCT         |
|--------------|-------------|
| 273          | 2700K-3step |
| 303          | 3000K-3step |
| 353          | 3500K-3step |
| 403          | 4000K-3step |
| 503          | 5000K-3step |
| 653          | 6500K-3step |


| CRI Bin Code | CRI  | R9  |
|--------------|------|-----|
| A            | > 80 | > 0 |

| Flux Bin Code | Tc=85°C |      |
|---------------|---------|------|
|               | Min     | Max  |
| T5            | 3014    | 3350 |
| U1            | 3160    | 3350 |
| U2            | 3350    | 3540 |
| U3            | 3540    | 3730 |
| U4            | 3730    | 3920 |


| Voltage Bin Code | Tc=85 °C |      | Tc=25 °C |      |
|------------------|----------|------|----------|------|
|                  | Min      | Max  | Min      | Max  |
| DB               | 30.7     | 36.1 | 32.0     | 37.6 |

1. Correlated color Temperature is derived from the CIE 1931Chromaticity diagram.
2. Lextar Electronics maintains a tolerance of  $\pm 3\%$  on forward voltage ,  $\pm 7\%$  on luminous flux ,  $\pm 2$  on CRI and R9.


### ■ Spectrum

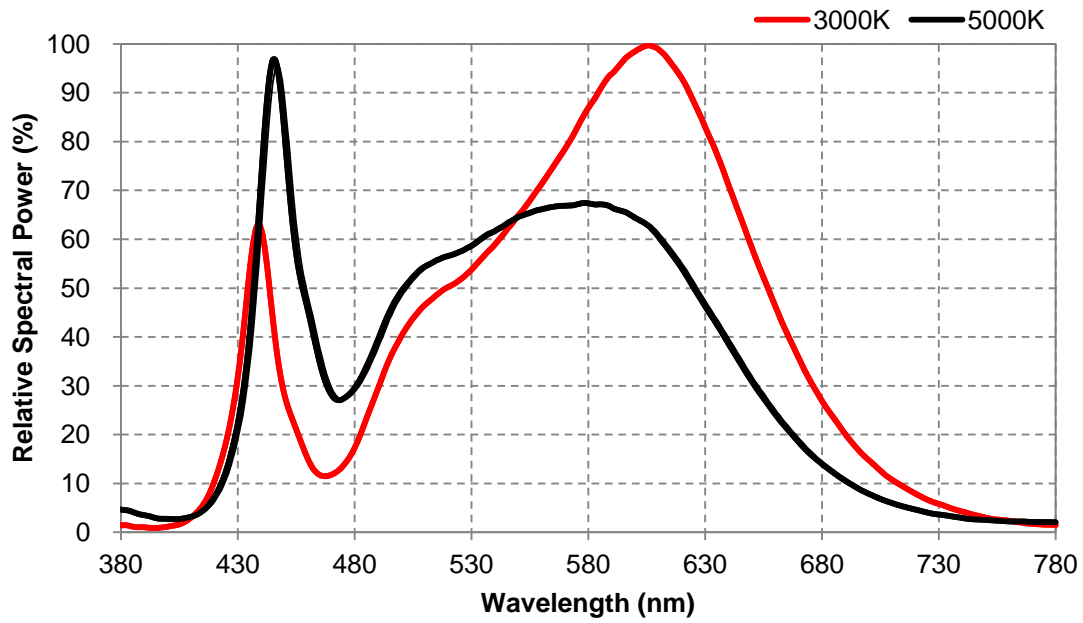


### ■ Radiation Pattern ( $I_F=720\text{mA}$ )

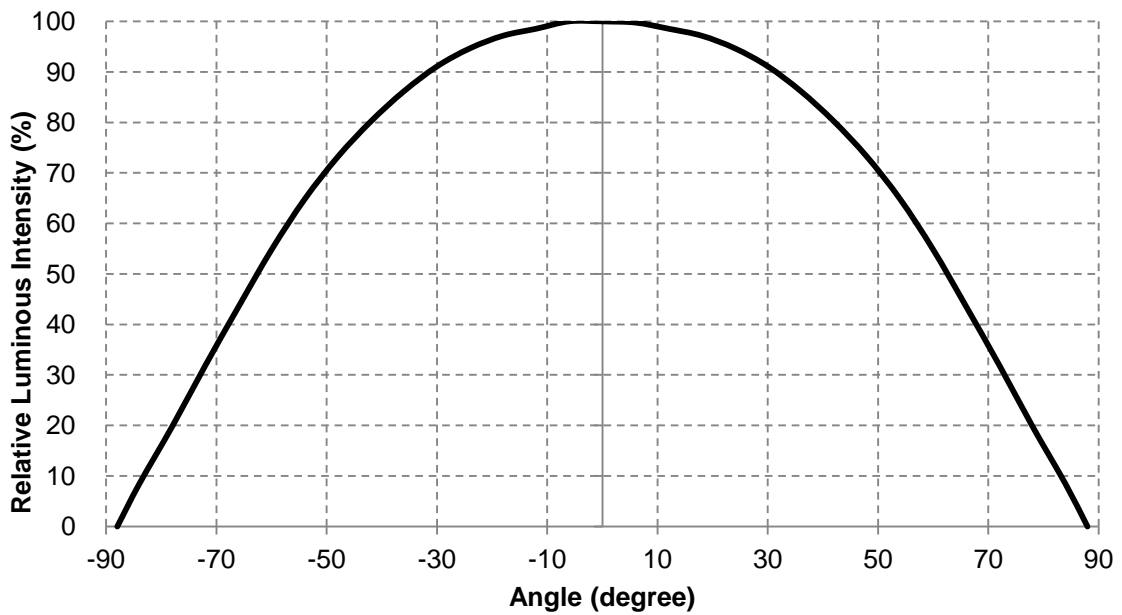

■ **Forward Voltage vs. Forward Current (Tc=85°C)**


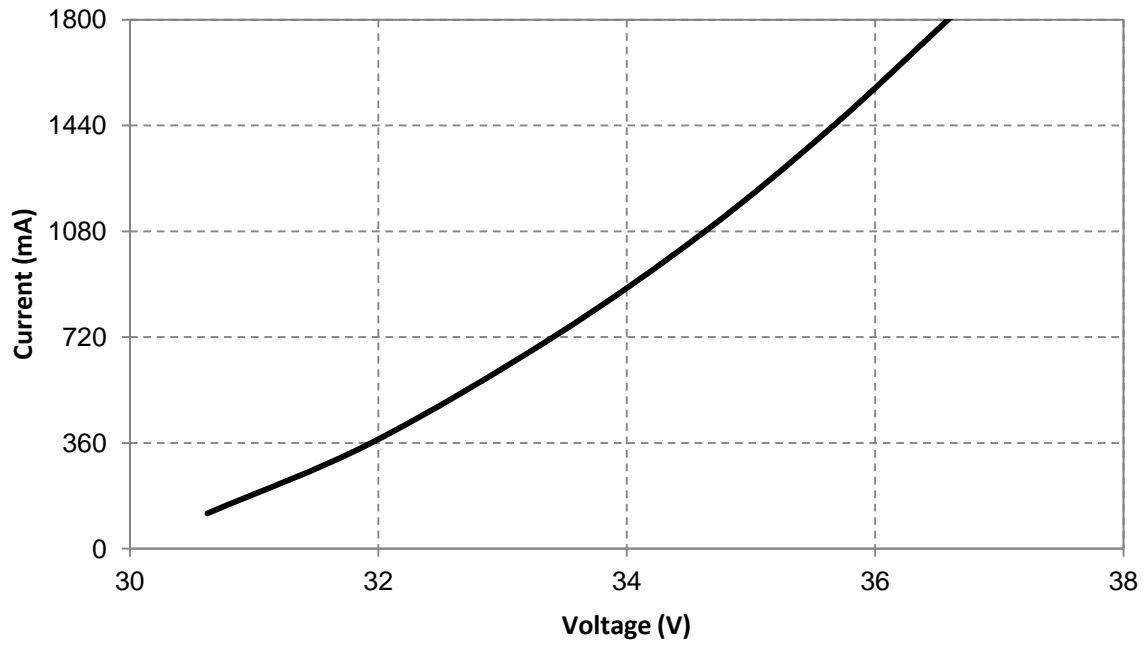


■ **Forward Current vs. Related Luminous Flux**

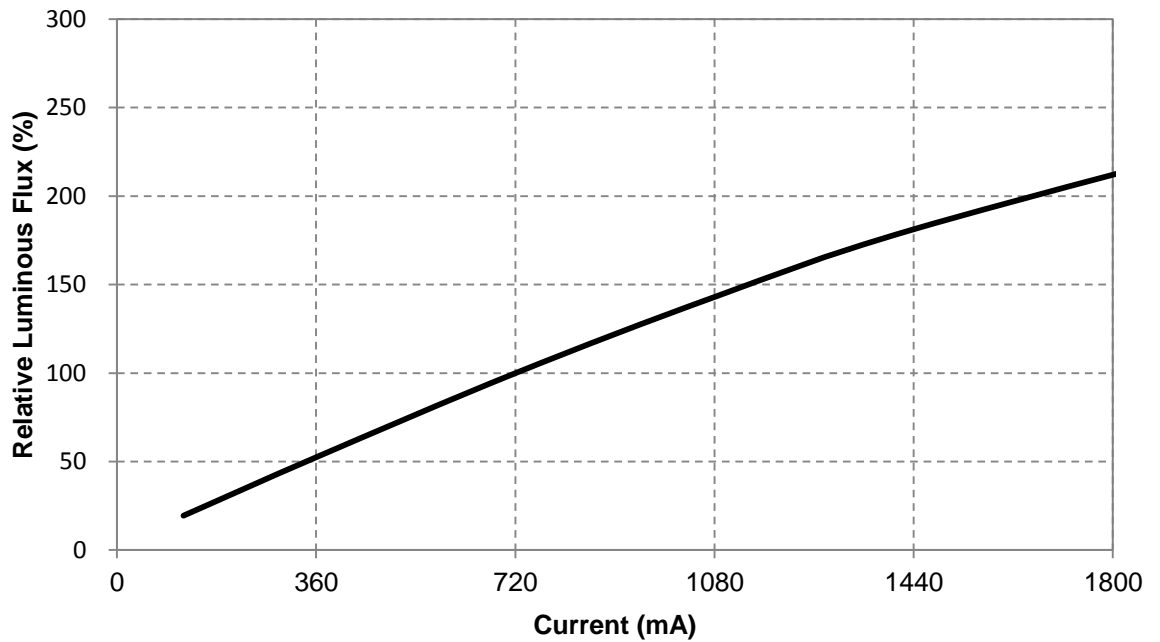





■ **Forward Current vs. Chromaticity Coordinate**

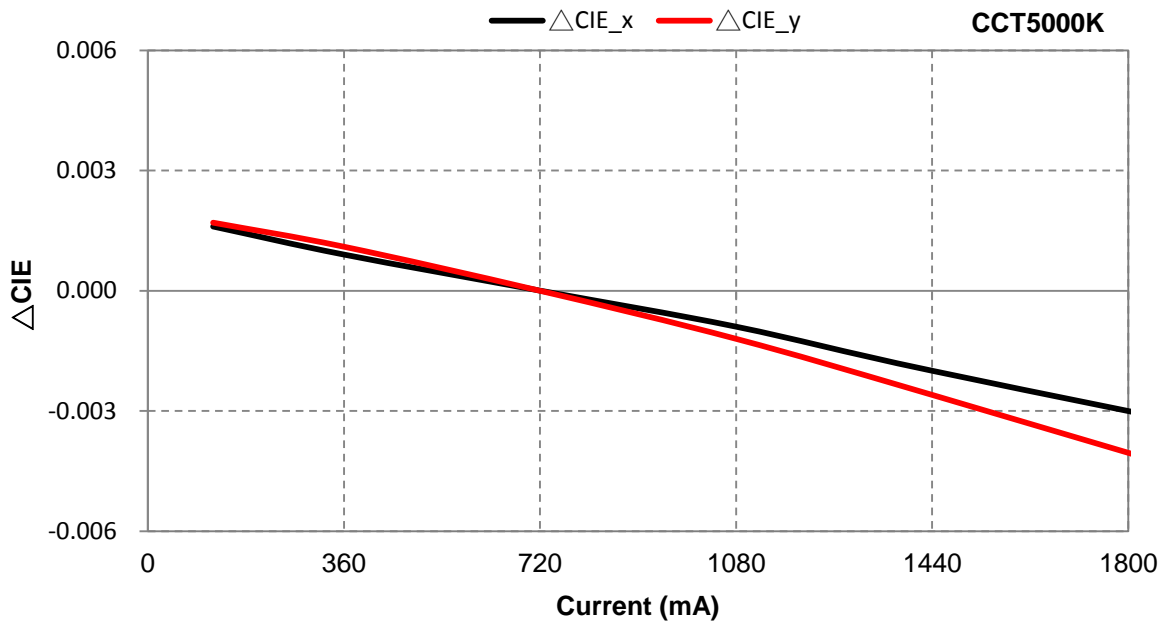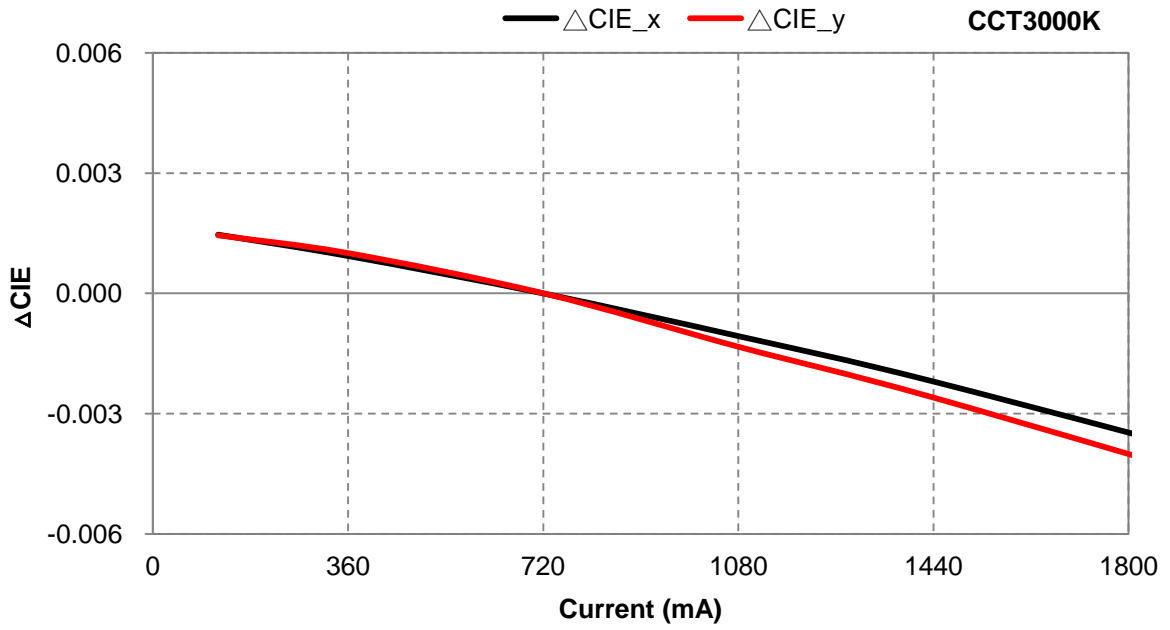



■ **Cast Temperature vs. Forward Voltage ( $I_F=720\text{mA}$ )**

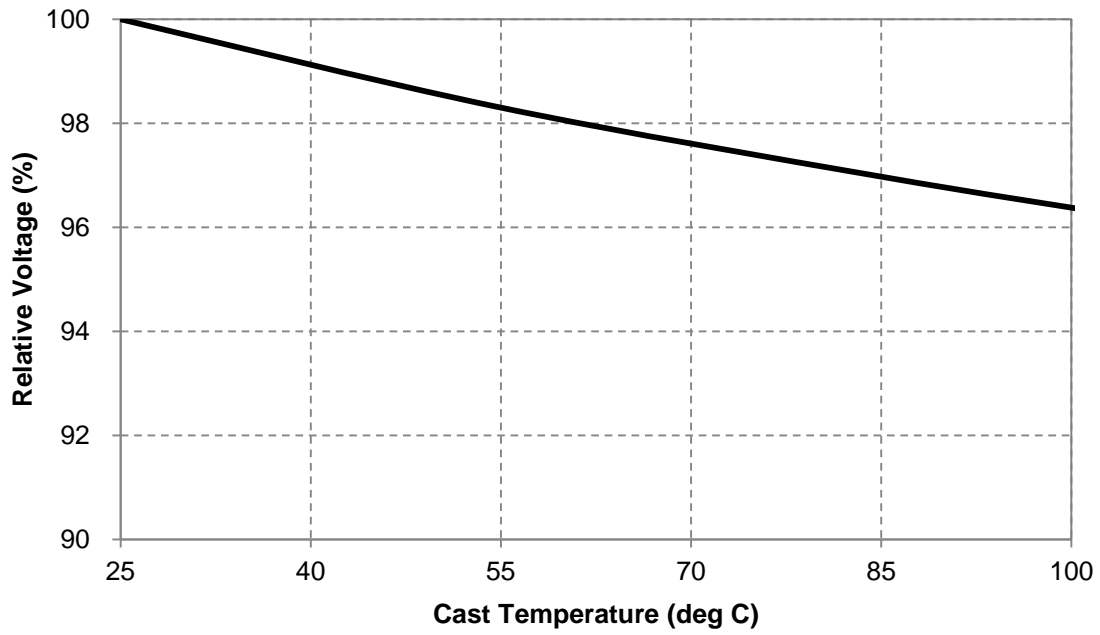


■ **Cast Temperature vs. Relative Luminous Flux ( $I_F=720\text{mA}$ )**

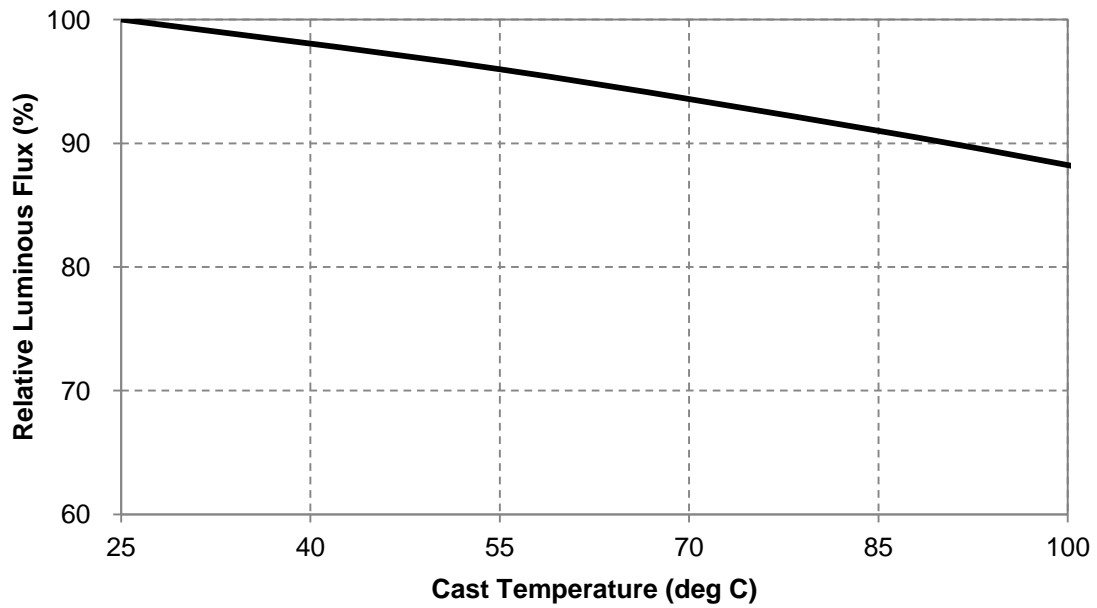

■ **Cast Temperature vs. Chromaticity Coordinate ( $I_f=720mA$ )**

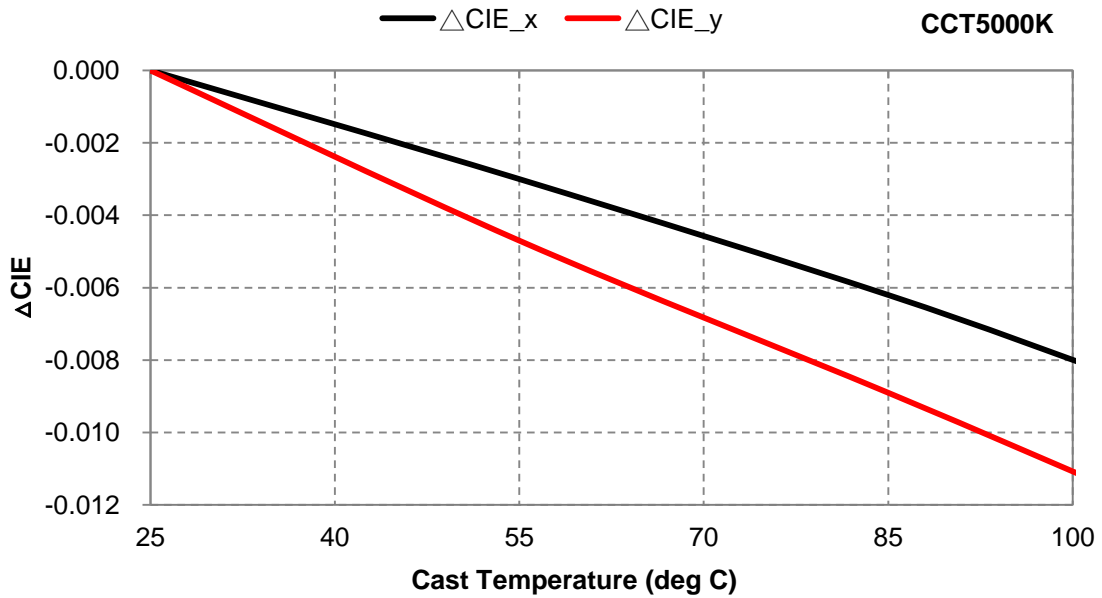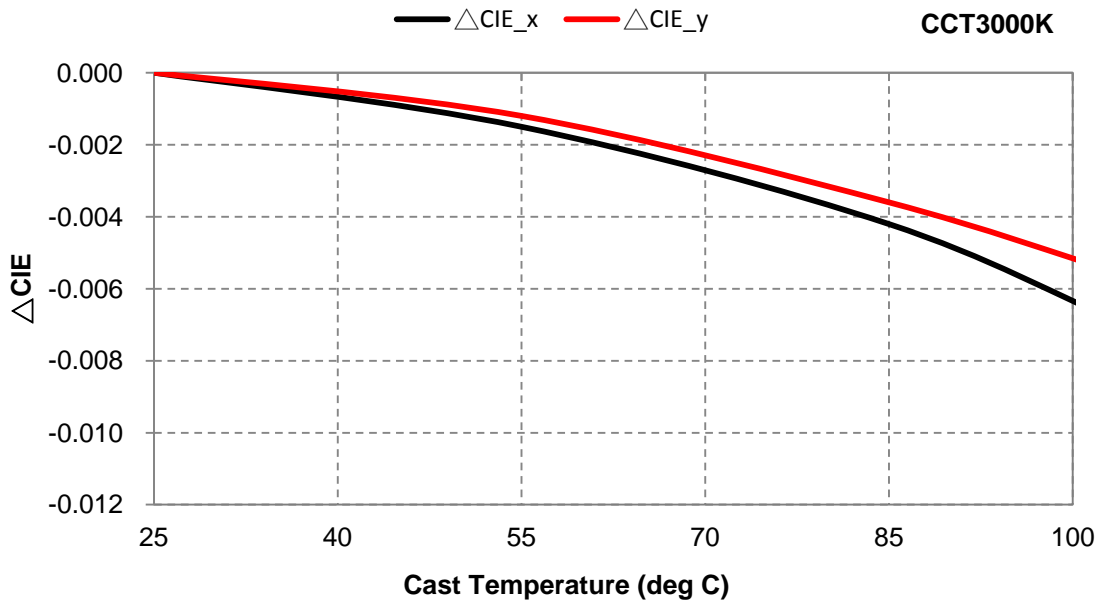

■ **Derating Characteristics**

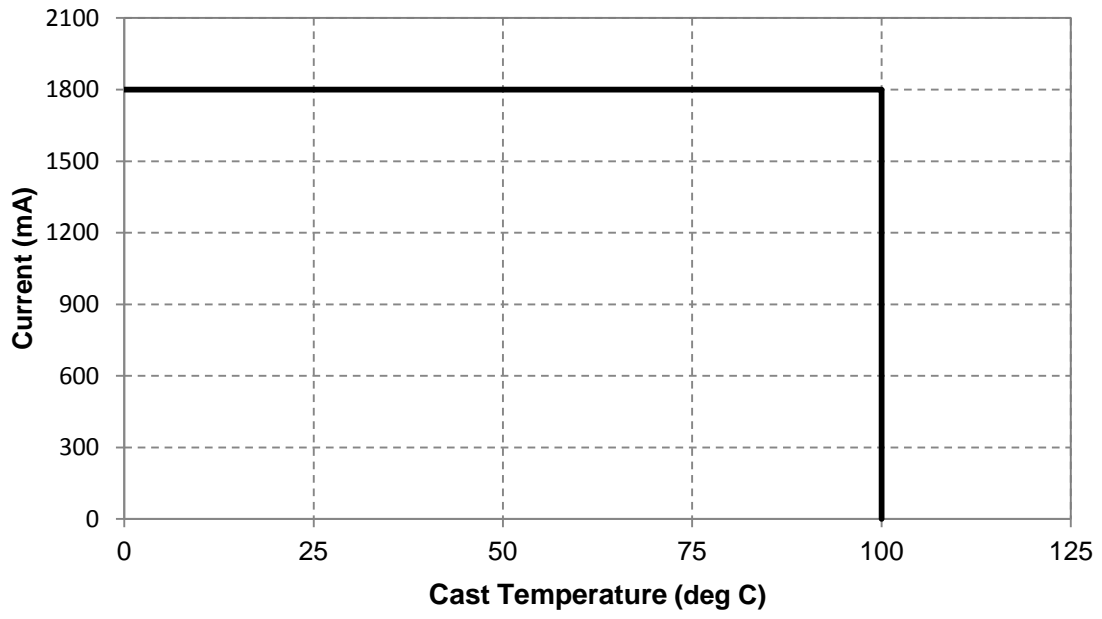

**Reliability**

PB26H01.0 Product Specification

| No | Item   | Condition                                   | Time/Cycle |
|----|--|---|------------|
| 1  | High Temperature Operation Life Test                   | Tc= 85°C                                    | 1000 Hrs   |
| 2  | Low Temperature Operation Life Test                    | Ta= -40°C                                   | 1000 Hrs   |
| 3  | High Temperature and High Humidity Operation Life Test | Tc= 85°C, 85%RH                             | 1000 Hrs   |
| 4  | High Temperature Storage                               | Ta= 100°C                                   | 1000 Hrs   |
| 5  | Low Temperature Storage                                | Ta= -40°C                                   | 1000 Hrs   |
| 6  | High Temperature High Humidity Storage                 | Ta= 85°C, 85 % RH                           | 1000 Hrs   |
| 7  | Temperature Cycle Storage                              | -40°C~100°C (20min dwell)<br>/5min transfer | 300 Cycles |

**Judgment Criteria**

| Item            | Symbol | Judgment Criteria    |
|-----------------|--------|----------------------|
| Forward Voltage | $V_F$  | $\Delta V_F < 10 \%$ |
| Luminous Flux   | $I_v$  | Decay $\leq 20 \%$   |

# Packing


PB26H01.0 Product Specification

## Tray


One tray composed of maximum 42 pieces COB.

One inner box contains maximum 10 trays (420 pieces) and one upper lid-tray in one anti static bag

<One tray>

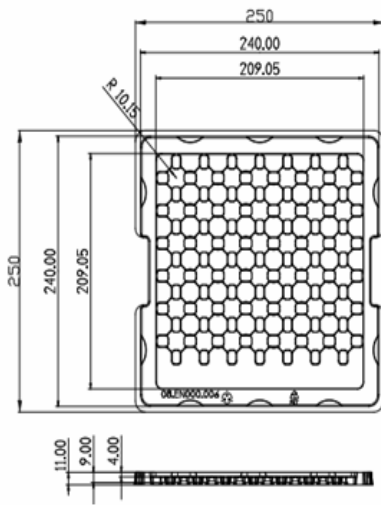

< One inner box >

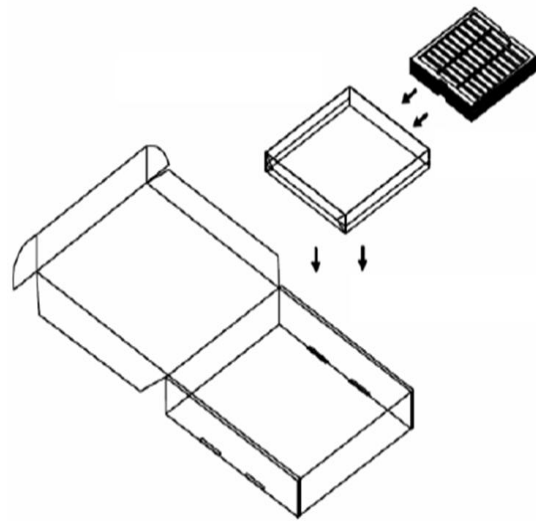

## Label information



WO : Working number  
 EQP ID : Equipment ID  
 P/N : Part number



SHIP ID : Shipment IS  
 BIN CODE : BIN CODE  
 M/N : Model Name  
 QTY : Quantity


## Precautions

PB26H01.0 Product Specification

1. Avoid the application of any stress to the resin portion (lighting area).
2. Avoid any contact by a sharp metal nail or other materials with the resin portion (lighting area).



3. This product should be secured firmly by fastening screws on both sides of the product. Please be careful not to apply any stress to the product during the clamping operation.

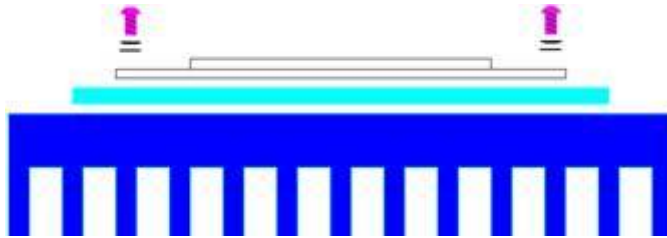

4. For fixing this product to the outer heat sink, thermal pad or thermal glue should be applied between backside of substrate and heat sink so that the product can dissipate heat completely. Please avoid product deformation when fixing the clamping operation.
5. Handling of static electricity
  - These products are sensitive to static electricity charge. Please prevent any static electricity within the assembling process.
  - All devices, equipment and machinery must be properly grounded. It is recommended that precautions be taken against surge voltage to the equipment that mounts the LEDs.
  - ESD sensitivity of this product is 1000V (HBM, based on JEITA ED-4701/304).
  - It is easy to find static-damaged LEDs by a light-on test.
6. Before open the package, should kept at room temperature, 90% RH environment or less. The LED should be used within 6 months.
7. After open the package, the LED should be kept at room temperature, 60% RH environment or less. The LED should be soldered within 168 hours (7 days) after opening the package. If unused LEDs remain, they should be stored in moisture proof packages, such as sealed containers with packages of moisture absorbent material (silica gel).
8. Applying proper resistor for the circuit design is recommended. Otherwise slight voltage shift may cause big current change and the LED may be burn out.
9. Please ensure that heat and electronic generation is not in excess of the absolute maximum rating.

## Revision History

PB26H01.0 Product Specification

| Date       | Contents          | Writer   |
|------------|-------------------|----------|
| 2016.03.05 | Datasheet Initial | Chin Lin |
|            |                   |          |

Lextar Electronics Corp. reserves the right to modify the technical information or data without notification when product is improved.

## *Smart Lighting Amazing Life*

Lextar Electronics Corp. is the leading LED (Light Emitting Diode) maker integrating upper stream epitaxial, middle stream chip, and downstream package, SMT and LED lighting applications. Founded in May, 2008, Lextar is a subsidiary of AU Optronics, the leading TFT-LCD and solar PV manufacturer. Lextar's product applications include lighting and LCD backlight. Lextar's manufacturing sites include Hsinchu and Chunan in Taiwan, and Suzhou in China.

The company turnover in 2010 is 266 million USD.